

HOPITAL DE JOUR



CORTEGA

CORTEGA



Recycled Content



Light Reflectance




Intelligibility

CORTEGA

BOARD




Prelude XL²/TLX 24 mm



TEGULAR



Prelude XL²/TLX 24 mm



600 x 600 x 15 mm

9102 M

9105 M

600 x 1200 x 15 mm

9101 M



EN ISO 354 & EN ISO 11654


| α_w | NRC | 125 | 250 | 500 | 1000 | 2000 | 4000 | Hz |
|----------------|------|------|------|------|------|------|------|------------|
| 0.55(H) | 0.55 | 0.30 | 0.35 | 0.50 | 0.65 | 0.70 | 0.80 | α_p |

Class D



EN ISO 10848-2 & EN ISO 717-1

Dnfw
34 dB

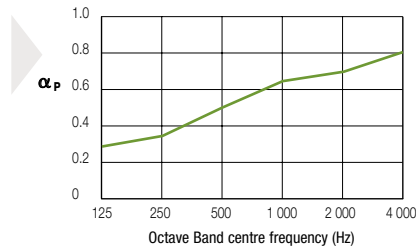

EEA Euroclass A2-s1, d0
EN 13501-1

RUS KM1 (G1, V1, D1, T1)
FZ 123



EN 12667 & ISO 8301

$\lambda = 0.06 \text{ W/m K}$



70 % RH



$\approx 3.5 \text{ kg/m}^2$



Please contact our Armstrong Technical Sales group for further details.

www.armstrong.eu