


# DUNE SUPREME/ DUNE VECTOR



Option: DUNE SUPREME Unperforated

[www.armstrong-ceilings.co.uk](http://www.armstrong-ceilings.co.uk)  
[www.armstrong-ceilings.ie](http://www.armstrong-ceilings.ie)  
[www.armstrong.eu](http://www.armstrong.eu)

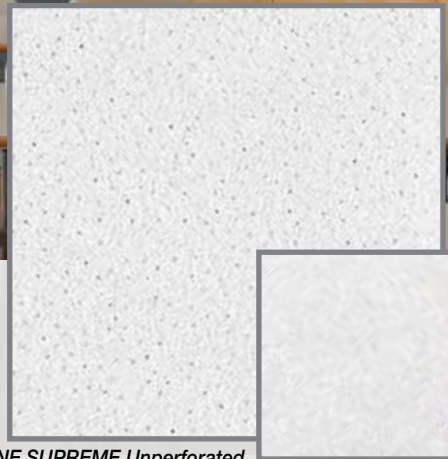

# DUNE SUPREME/ DUNE VECTOR



## DUNE SUPREME/ DUNE VECTOR

	BOARD	TEGULAR	MICROLOOK	VECTOR
	 Prelude XL <sup>2</sup> /TLX 24 mm Prelude Sixty <sup>2</sup>	 Prelude XL <sup>2</sup> /TLX 24 mm Prelude Sixty <sup>2</sup>	 Prelude XL <sup>2</sup> /TL 15 mm Interlude XL <sup>2</sup> 15 mm	 Prelude XL <sup>2</sup> 24 mm Prelude Sixty <sup>2</sup>
	 15mm	 9.5mm 15mm 15° A 6.5mm	 5mm 8mm 15mm 15° A	 575mm 19mm 10mm 594mm 6mm 10mm 594mm 14mm
<b>DUNE</b>			9813 M	3321 M
500 x 500 x 15 mm				
600 x 600 x 19 mm				
1200 x 300 x 15 mm			2020 M	
1200 x 600 x 15 mm		9687 M	2727 M	
<b>DUNE SUPREME</b>				
600 x 600 x 15 mm	2271 M	2273 M	2274 M	
600 x 1200 x 15 mm	2272 M			
<b>DUNE SUPREME Unperforated</b>				
600 x 600 x 15 mm	2276 M	2278 M	2279 M	
600 x 1200 x 15 mm	2277 M			




COLORTONE DUNE: Carrara (CA), Platinum (PN), Blue Mountain (BT).



EN ISO 354 & EN ISO 11654

$\alpha_w$	NRC	125	250	500	1000	2000	4000	Hz	
• DUNE SUPREME (Board/Tegular/MicroLook)									
<b>0.55</b>	0.50	0.40	0.45	0.55	0.60	0.50	0.45		$\alpha_p$
<b>Sound Absorption Class = D</b>									
• DUNE (Board/Tegular/MicroLook)									
<b>0.55</b>	0.50	0.40	0.40	0.55	0.55	0.50	0.45		$\alpha_p$
<b>Sound Absorption Class = D</b>									
• DUNE Vector									
<b>0.65</b>	0.65	0.50	0.55	0.55	0.70	0.70	0.60		$\alpha_p$
<b>Sound Absorption Class = C</b>									
• DUNE SUPREME Unperforated Board/Tegular/MicroLook									
<b>0.15(L)</b>	0.20	0.40	0.30	0.15	0.15	0.15	0.25		$\alpha_p$
<b>Sound Absorption Class = E</b>									

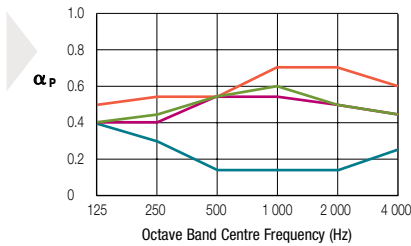

EN ISO 10848-2 / EN 2014069 & EN ISO 717-1

**Dncw 35 dB** (DUNE SUPREME/DUNE and DUNE SUPREME Unperforated)

**Dnfw 35 dB** (DUNE Vector)



EN ISO 140-3 & EN ISO 717-1

**Rw 17 dB** (15 mm)



EEA Euroclass A2-s1, d0  
EN 13501-1

RUS KM1 (G1, V1, D1, T1)  
FZ 123



EN 12667 & ISO 8301

$\lambda = 0.06$  W/m K



99 % RH (DUNE SUPREME)  
95 % RH (DUNE VECTOR)



**15 YEAR** guarantee  
**30 YEAR** system guarantee



3.7 kg/m<sup>2</sup> (DUNE SUPREME)  
≈ 6.2 kg/m<sup>2</sup> (DUNE Vector)

\* DUNE SUPREME / DUNE SUPREME Unperforated = 44%, DUNE Vector = 43%. \*\*DUNE = 84%.

Please contact the Armstrong Technical Sales group for further details.

[www.armstrong-ceilings.co.uk](http://www.armstrong-ceilings.co.uk)  
[www.armstrong-ceilings.ie](http://www.armstrong-ceilings.ie)  
[www.armstrong.eu](http://www.armstrong.eu)

