

CERAMAGUARD (100% RH)

[www.armstrong.eu](http://www.armstrong.eu)



# CERAMAGUARD (100% RH)



## CERAMAGUARD

## BOARD



Prelude XL<sup>2</sup> / TLX / \*Corrosive Resistant 24 mm / Clean Room Grid 24 mm



600 x 600 x 15 mm  
600 x 1200 x 15 mm


607 M  
608 M



EN ISO 354 &  
EN ISO 11654

$\alpha_w$	NRC	125	250	500	1000	2000	4000	Hz
<b>0.55(MH)</b>	0.60	0.25	0.30	0.50	0.80	0.85	0.75	$\alpha_p$

Sound Absorption Class = D

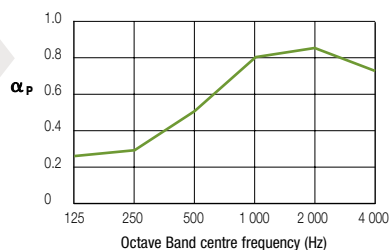

EN 20140-9  
& EN 717-1

<b>D<sub>ncw</sub></b>	
<b>39 dB</b>	



EEA	Euroclass A1
EN 13501-1	

RUS	KM0 (NG)
FZ 123	



EN 12667  
& ISO 8301

$\lambda = 0.067$  W/m K



100 % RH



7 kg/m<sup>2</sup>  
20 kg/m<sup>2</sup> if wet

\*CERAMAGUARD must be installed on Corrosive Resistant 24 mm (CR 24 mm) grid where humidity regularly exceeds 95% RH. CERAMAGUARD may need to have main runners at 600 mm centres due to increased weight in high humidity conditions.

Please contact the Armstrong Technical Sales group for further details.

[www.armstrong.eu](http://www.armstrong.eu)

**Armstrong®**