



**NEWTONE** (100% RH)

# NEWTONE (100% RH)



Light Reflectance




Confidentiality

NEWTONE

BOARD



Prelude XL<sup>2</sup> / TLX 24 mm / \*Corrosive Resistant 24 mm / Clean Room Grid 24 mm



600 x 600 x 6 mm


1201 M



EN ISO 354 &  
EN ISO 11654

$\alpha_w$	NRC	125	250	500	1000	2000	4000	Hz
<b>0.10(L)</b>	0.10	0.25	0.15	0.10	0.10	0.10	0.05	<b><math>\alpha_p</math></b>

Sound Absorption Class = Not classified

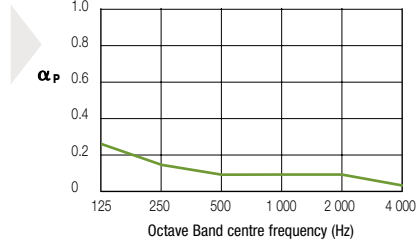

EN 20140-9  
& EN 717-1

<b><math>D_{ncw}</math></b>	
<b>37 dB</b>	



EEA Euroclass A2-s1, d0	RUS KMO (NG)
EN 13501-1	FZ 123



100 % RH

**15 YEAR** guarantee  
**30 YEAR** system guarantee



≈ 6 kg/m<sup>2</sup>

\*In all environments where humidity conditions could regularly reach and/or exceed 90% RH we recommend the use of our Corrosion Resistant grids and associated accessories.



Please contact the Armstrong Technical Sales group for further details.

[www.armstrong.eu](http://www.armstrong.eu)



**Armstrong**<sup>®</sup>