


# PARAFON HYGIEN (ISO 5)

[www.armstrong.eu](http://www.armstrong.eu)




# PARAFON HYGIEN (ISO 5)



## PARAFON HYGIEN

## BOARD



Prelude XL<sup>2</sup> / TLX / Corrosive Resistant 24 mm / Clean Room Grid 24 mm




600 x 600 x 18 mm	9702 M
625 x 625 x 18 mm	9702 D
600 x 1200 x 18 mm	9703 M



EN ISO 954 &  
EN ISO 11654

$\alpha_w$	NRC	125	250	500	1000	2000	4000	Hz
<b>0.95</b>	0.95	0.40	0.85	0.90	0.90	0.95	0.90	$\alpha_p$

**Sound Absorption Class = A**

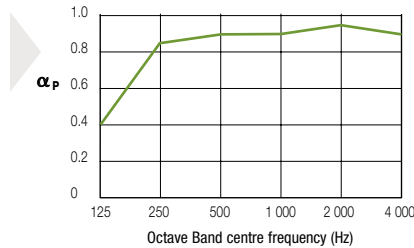

EEA Euroclass A2-s1, d0

EN 13501-1



EN 12667  
& ISO 8301

$\lambda = 0.033$  W/m K



ISO 14644-1

ISO 5



95 % RH



15 YEAR  
guarantee



30 YEAR  
system  
guarantee



1.3 kg/m<sup>2</sup>

\* The application must be in the form of a fan spray of min 30° angle and not a high pressure "cutting" jet. The suggested minimum distance between the nozzle and the ceiling tile should not be less than 300 mm and the angle of projection should be 45°. Parafon Hygien should be installed with Armstrong Corrosive Resistant 24 mm grid and be clipped for high pressure water cleaning. Cleaning recommended twice a year.

Please contact the Armstrong Technical Sales group for further details.

[www.armstrong.eu](http://www.armstrong.eu)

**Armstrong®**