

PERLA dB


PERLA dB



PERLA dB	BOARD	TEGULAR	MICROLOOK BE	SL2
	 Prelude XL ² /TLX 24 mm Prelude Sixty ²	 Prelude XL ² /TLX 24 mm Prelude Sixty ²	 Prelude XL ² /TL 15 mm Silhouette XL ² 15 mm Interlude XL ² 15 mm	 Prelude 24 mm Main Runner Prelude Sixty ²
Board & Tiles				
600 x 600 x 19 mm	3191 M	3192 M	3193 M	
675 x 675 x 19 mm			5763 M	
Planks				
300 x 1500 x 19 mm				3797 M
300 x 1800 x 19 mm				3798 M
300 x 2500 x 19 mm				3799 M



α_w	NRC	125	250	500	1000	2000	4000	Hz
• Board, Tegular, MicroLook BE								
0.60(H)	0.65	0.30	0.40	0.55	0.70	0.85	0.95	α_p
Sound Absorption Class = C								
• SL2								
0.50(H)	0.50	0.30	0.35	0.40	0.60	0.70	0.80	α_p
Sound Absorption Class = D								

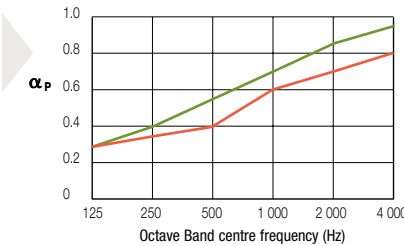

D_{nfw}
43 dB (SL2)
41 dB (Board, Tegular, MicroLook BE)



R_w
21 dB (Board, Tegular, MicroLook BE)



EEA Euroclass A2-s1, d0	RUS KM1 (G1, V1, D1, T1)
EN 13501-1	FZ 123



$\lambda = 0.06 \text{ W/m K}$



ISO 5



95 % RH



7.6 kg/m²

Please contact the Armstrong Technical Sales group for further details. www.armstrong.eu

